



## INSTALLATION INSTRUCTIONS

# RPT

### Petite Profile/LED Replacement System

#### Voltage/ Power Supply:

#### LED

- 12v DC
- Powered by Magnetic Low Voltage Drivers
- Polarity sensitive (red or black is positive, white or blue is negative)
  - If lights don't illuminate, try reversing leads.
  - Restore electricity & check operation of fixture.

Fixtures are packed in plastic bags for protection during the shipping process. Please note tagging code if required.

**! DISCONNECT THE POWER BY TURNING OFF CIRCUIT BREAKER OR REMOVING FUSE AT FUSE BOX !**

**! Do not plug the fixtures directly into the electrical outlet !**

#### Installation Option 1: VHB Tape

Please ensure that the mounting area is neat, clean, dry and free from any chemical residue. For best results, RSL recommends using a high quality VHB (very high bond) double sided tape. Remove backing from the tape and secure with great compression to the fixture. Repeat for each piece of tape that is being used along the length of the fixture. Once the final position of the fixture is established, remove the backing pieces from each piece of tape. Using great care, compress the fixture to the final location.

- Recommended tape spacing: LED: 6" intervals

cont...

Any questions on voltage type, maximum wattage, or re-lamping, please call or contact us at:



ROBERTS STEP-LITE SYSTEMS ■ 8100 SW 15th St. ■ Oklahoma City, OK 73128  
info@robertsstemplite.com ■ www.robertsstemplite.com  
405.728.4895 ■ 800.654.8268 ■ F: 405.728.4878





**RPT**

## Petite Profile/LED Replacement System

continued



### Installation Option 2: Adhesive Fastening

Please ensure that the mounting area is neat, clean, dry, and free from any chemical residue. RSL recommends using a high quality construction adhesive or sealant to bond the fixture to the substrate. A continuous bead of adhesive/sealant reduces the opportunity for the fixture to sag when fully cured. The fixture should be supported every 8-12" while the material cures-typically 24-36 hours.

#### Special Notes:

All electrical connections must be in accordance with local codes, ordinances, or the national electrical code. If you are unfamiliar with methods of installing electrical wiring, retain the service of a qualified licensed Electrician. Before starting the installation, disconnect the power by turning off the circuit breaker or removing the fuse from the fuse box. Turning off the light switch is not sufficient to prevent electrical shock.

Connect the wires from the fixture to the low voltage wires from the power supply. Use UL/CSA listed connectors suitable for the size and type of wire. No loose strands or loose connections should be present.

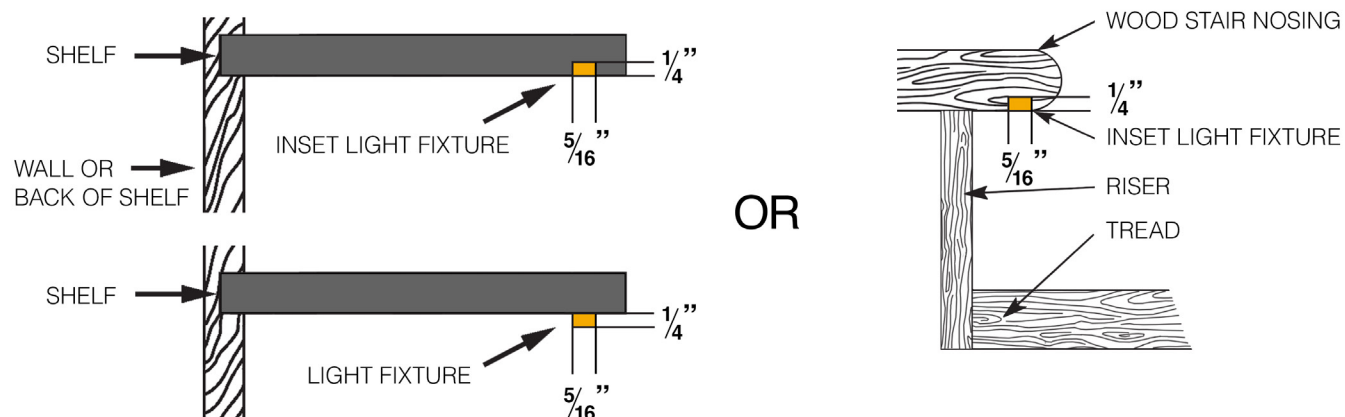

Any questions on voltage type, maximum wattage, or re-lamping, please call or contact us at:



ROBERTS STEP-LITE SYSTEMS ■ 8100 SW 15th St. ■ Oklahoma City, OK 73128  
info@robertsstemplite.com ■ www.robertsstemplite.com  
405.728.4895 ■ 800.654.8268 ■ F: 405.728.4878

