



CUSTOM LOW VOLTAGE LIGHTING



Low Profile-Special Purpose

SERIES **RWX24**LED

- Slim line contour of continuous light in our lowest profile housing
 - 120 degree viewing angle
- Low temperature, warm to the touch
- 24 Volt for economical power use
 - 50,000 hour average lifetime
- Completely dimmable light system
 - Dimmable and Non-Dimmable drivers are available
 - Drivers are installed remotely with secondary wiring running back to the light locations.
- Fixtures fabricated to custom lengths
- Maximum fixture length is 15 feet
- Housing is white extruded UV stabilized plastic
- Clear or frosted lens cover with UV inhibitors
- Can be mounted with mounting clips (included), VHB tape or silicone adhesive
- UL 94-VO flammability rated
- Lead wires are 18", unless ordered longer
- Components are UL listed
- IP67 Rated

The RSL RW 24 Low Profile SP incorporates a robust, durable housing in a low profile that enables dimmable luminous intensities for various exterior and interior architectural details in more challenging applications. This makes the product ideal for illuminating niches, retaining walls, fountain/garden areas, interior coves and other applications. The Low Profile SP is an excellent choice for any lighting task that demands a robust, water-and-weather resistant fixture.

INDOOR/OUTDOOR:

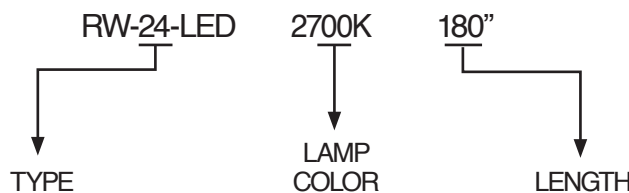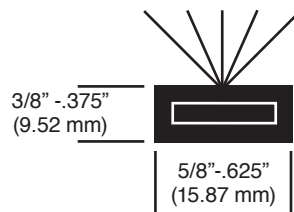

**ORDER/SPECIFY BY
CATALOG NUMBERS**






CUSTOM LOW VOLTAGE LIGHTING

Low Profile-Special Purpose

SERIES **RWX24LED**

DIMMABLE	DESCRIPTION	RATING	NOTES
	48w. Dimmable- Magnetic, 120v/ 24v DC	UL/3R	ETL System Listed with RSL LEDs
	96w. Dimmable- Magnetic, 120v/ 24v DC	UL/3R	ETL System Listed with RSL LEDs
	288w. Dimmable- Magnetic, 120v/ 24v DC	ETL/3R	ETL System Listed with RSL LEDs

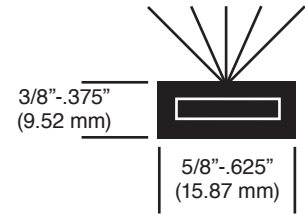

24 VOLT	Driver Power – Fixture Length Max RSL's recommended fixture lengths/driver				
		3.4 Watts	1.9 Watts	1.5 Watts	0.60 Watts
DIM	48w. Driver	10'	n/a	n/a	n/a
	96w. Driver	20'	n/a	n/a	n/a
	288w. Driver (3-96w. drivers)	62'	n/a	n/a	n/a

TEMP K	COLOR	LUMENS BRIGHTNESS	LED SPACING	CRI	POWER CONSUMPTION WATTS/FT
2700K	Warm White	285 lumens/ft.	16.7mm/.66in	70+	3.70 ft
4000K	Neutral White	302 lumens/ft.	16.7mm/.66in	70+	3.70 ft
6000K	Daylight White	299 lumens/ft.	16.7mm/.66in	70+	3.70 ft

■ The RSL team will be happy to help with establishing power point locations for your project

Custom fabricated fixtures are manufactured to the exact dimension required. Each LED fixture is built with an 18" lead wire from one end. NOTE: various fixtures permit the client to specify from which end the lead wires exit. The maximum fixture length for any type is 15 feet (180 inches.) (Please consult with an RSL representative for solutions on extra-long lengths.) When pricing, always round up to the nearest half foot. Kelvin temperature (color) is +/- 300K.



ROBERTS STEP-LITE SYSTEMS ■ 8100 SW 15th St. ■ Oklahoma City, OK 73128
 info@robertsstemplite.com ■ www.robertsstemplite.com
 405.728.4895 ■ 800.654.8268 ■ F: 405.728.4878

