




CUSTOM LOW VOLTAGE LIGHTING

SERIES **RM12**

Deluxe Cove Light

- Slim profile cove accent lighting with decorative white molding
- Moldings can be field painted to client's color choice
- 12 Volt for economical power use:
 - Light system is 12 Volt and requires transformers supplied by RSL
 - Transformers are installed remotely with secondary wiring running back to fixture locations
- 1 watt lamps, 3.8 lumens, 2200K color temperature
- Choice of two lamp spacings:
 - "EB" 1.2" oc (max length 10ft.)
 - "STD" 2." oc (max length 15ft.)
- Easy to replace lamps (included) for years of service
 - 10,000 hour average lifetime
- Cove light system is completely dimmable
- Lights should be ordered to the nearest 1/4 inch of length required
- Accent cove molding can be ordered and pre-shipped in bulk for installation before ordering light from field measurements

Roberts RM-12 Series Deluxe Cove lighting is designed for wall mounting to direct soft glow lighting up toward the ceiling or down toward the floor. The Deluxe Cove accent lighting with decorative white molding is the perfect choice to enhance and highlight the beauty of a particular style of moldings, or to provide corridor lighting for special effect and ease of movement.

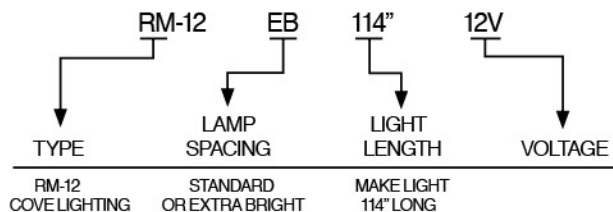

ORDER/SPECIFY BY CATALOG NUMBERS







CUSTOM LOW VOLTAGE LIGHTING

Deluxe Cove Light

SERIES **RM12**

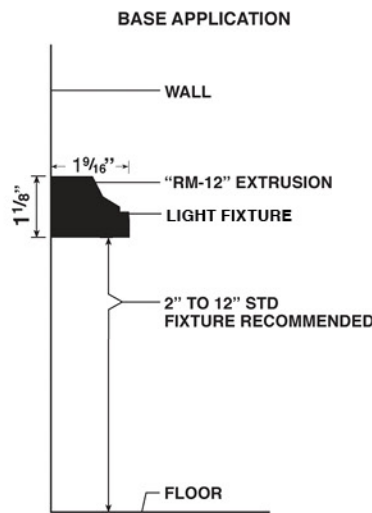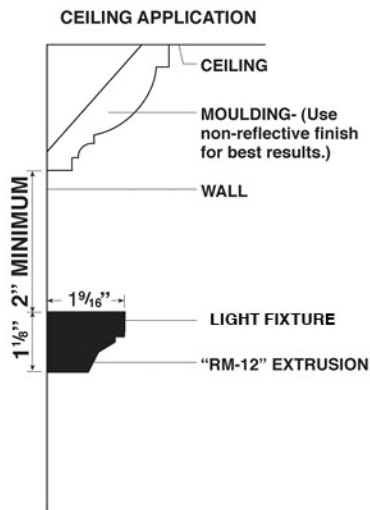

ETL listed Transformers are NEMA-R3 rated 120/12v and, rated for indoor/outdoor use. The heavy gauge steel enclosure resists weather and corrosion. Special voltages and secondary breaker configurations are available. Please call us for more information.

12 VOLT	MODEL	DESCRIPTION	TYPE
	100va	10A breaker (max load 80 watts)	Indoor-Outdoor
	150va	15A breaker (max load 120 watts)	Indoor-Outdoor
	250va	25A breaker (max load 200 watts)	Indoor-Outdoor
	500va	2-25A breakers (max load 400 watts)	Indoor-Outdoor
	750va	3-25A breakers (max load 600 watts)	Indoor-Outdoor
	1000va	4-25A breakers (max load 800 watts)	Indoor-Outdoor

LAMP SPACING	COLOR TEMPERATURE	SPACING (O.C.)	WATTS/FOOT	LUMENS/FOOT
Standard (STD)	2200K	2"	6	22.8
Extra Bright (EB)	2200K	1.2"	10	38

■ The RSL team will be happy to help with establishing power point locations for your project



ROBERTS STEP-LITE SYSTEMS ■ 8100 SW 15th St. ■ Oklahoma City, OK 73128
 info@robertsstemplite.com ■ www.robertsstemplite.com
 405.728.4895 ■ 800.654.8268 ■ F: 405.728.4878

