



CUSTOM LOW VOLTAGE LIGHTING

RW SERIES LED Low Profile Step Light

T24/JA8 certified

- The RW-12-JA8 offers a Slim line contour of continuous light in our lowest profile housing with 120 degree viewing angle and CRI of 90+ as well as high efficacy.
- T24/JA8 certified when used with Lutron LTEA4U1UKL-AV120 dimmable drivers or, Magnetic 36w, 60w, and 4x60w 12vdc/120v dimmable drivers supplied by RSL.
- Custom light lengths manufactured to the nearest 1/4".
- Maximum fixture length is 15'.
- 12vdc for economical power use, LED uses 3watts per ft., LED spacing 0.33".
- 50,000 hour average lifetime.
- Dimmable light system.
- Drivers are installed remotely with secondary wiring running to light locations.
- Housing is white extruded UV stabilized plastic.
- Clear or Frosted lenses with UV inhibitors.
- Mounting clips (included) or can be mounted with silicone adhesive.
- Dry/Damp rated.
- UL 94-VO flammability rated.
- Standard lead lengths of 18" provided. Up to 20ft. lead length available.

The RW-12-JA8 fixture features a durable low profile housing & lens that can be custom fabricated to any length for use in various architectural details such as fine casework, niches, coves, handrails and select kitchen cabinetry. The RW-12 is dimmable and enables various luminescent details to highlight craftsmanship and artistry. For exterior applications, we recommend the RWX-12 LED




LED Options

CCT	Brightness	Efficacy	CRI
2700K-VHB	1225 lumens/meter	118.9 lumens/watt	90+
3000K-VHB	1225 lumens/meter	120.1 lumens/watt	90+
4000K-VHB	1225 lumens/meter	120.1 lumens/watt	90+


Dimmable Driver Options

Lutron	LTEA4U1UKL-AV-120
Magnetic	36W12VDim 120 AC
Magnetic	60W12VDim 120 AC
Magnetic	4x60W12VDim 120 AC
	XXXX W12VDim XXX AC

*Magnetic 36W, 60W, 4X60W are available in 120V, 240V and 277V Primary Voltages

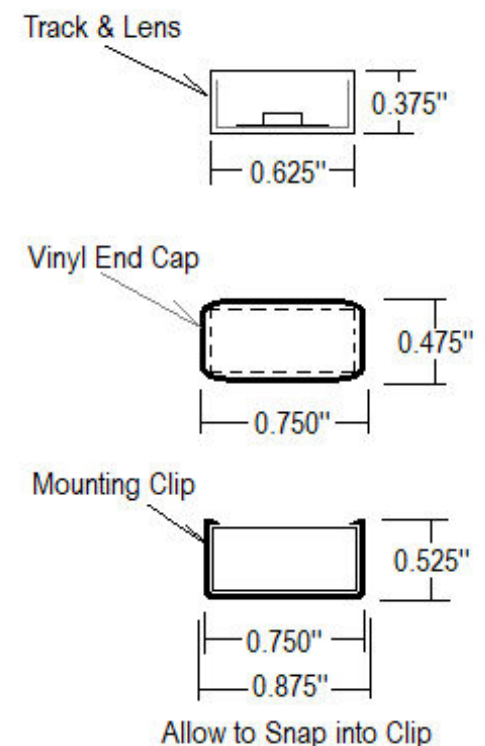

ORDER EXAMPLE

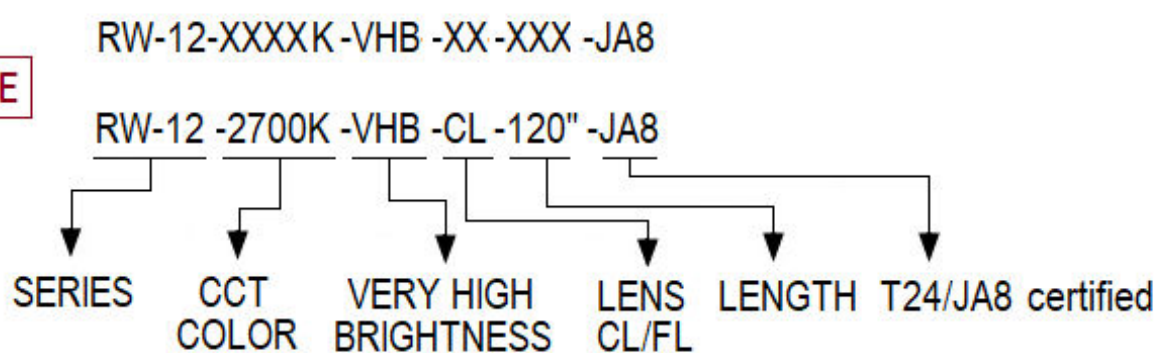

*Dimensions may vary slightly